

PRODUCT DATA

3 03 01 20 Maintenance of Concrete Reinforcing

EMACO[®] CP INTACT GALVANIC ANODES

Embedded galvanic anode for the protection of reinforcing steel

Description

Emaco[®] CP Intact Galvanic Anodes are engineered discrete zinc anodes encased in a proprietary mortar. Integral galvanized tie wires permit easy connection to concrete reinforcement. As a key component of a complete concrete repair strategy, the sacrificial zinc core generates a small electrical current as it is consumed, protecting the reinforcing steel from accelerated corrosion.

Yield

Job-site dependent. Consult Emaco CP Intact Installation Guide.

Packaging

Varies by size. See property chart.

Color

Color coded for quick and easy identification. See property chart.

Shelf Life

3 years when stored properly

Storage

Store in clean, dry conditions

Features

- Chelation Driven System
- Lower pH mortar
- High grade ASTM B418 type II zinc alloy
- Pre-twisted tie wires
- Increased zinc surface area
- Generates small current as it deteriorates, to protect reinforcing steel
- Enhanced transport of reaction by products
- Not affected by carbonation or auto-corrosion

Benefits

- Prevents re-passivation of the zinc; Optimizes service life
- Non-caustic; Safe to handle
- Prolonged shelf life; Reduced tendency toward degradation
- Proper stand-off from reinforcing steel; Ensures optimal current throw; Fast, easy installation
- Optimizes anode performance; Extends service life; up to 50% more efficient than other anodes of same zinc weight
- Extends service life and reduces maintenance costs
- Anode reactivates after wet/dry cycles; Longer service life
- Greater shelf life

Where to Use

APPLICATION

- Where reinforced structures will be repaired
- Where chlorides are present in the structure
- Wherever corrosion of reinforcing steel is possible
- In post-tensioned, prestressed, or conventionally reinforced structures

LOCATION

- Interior or exterior

SUBSTRATE

- Concrete or masonry

How to Apply

1. Demolition: All loose and spalled concrete should be removed in accordance with conventional repair guidelines. Emaco CP Intact Anode positioning should be considered when removing the existing concrete.

2. Positioning: In most applications, the anodes should be positioned at the perimeter of the repair and on plane with the reinforcing steel to provide a proper level of cover. Anodes must be positioned so that the entire anode and the wire connections to the reinforcing steel are totally covered by the encasement material once the repair is complete.

3. Preparation: For correct electrical connection and anode function, only structures using black bar reinforcing are suitable; the surface of the reinforcing steel should be untreated and cleaned to a near white surface condition in areas designated for the connection of Emaco CP Intact Anodes. No other pretreatment or post treatment of the steel is necessary or permitted.



Technical Data

Composition

Emaco CP Intact Anodes are engineered zinc-alloy anodes encased in a proprietary mortar, which connect to reinforcing steel using integral galvanized steel tie wires.

Test Data

PROPERTY	EMACO CP INTACT 65G	EMACO CP INTACT 105G	EMACO CP INTACT 150G
Color	Green	Blue	Orange
Packaging (anodes/box)	30	24	24
Total anode weight	0.53 lb (0.24 kg)	0.75 lb (0.34 kg)	0.82 lb (0.37 kg)
Zinc alloy	ASTM B418, Type II	ASTM B418, Type II	ASTM B418, Type II
Zinc content	0.14 lb (65 g)	0.23 lb (105 g)	0.33 lb (150 g)
Zinc surface area	20.6 in ² (133 cm ²)	40 in ² (258 cm ²)	42 in ² (279 cm ²)
External surface area	34 in ² (219 cm ²)	40 in ² (258 cm ²)	40 in ² (258 cm ²)
Auto-corrosion	<0.0004 in/yr (<0.01 mm/yr)	<0.0004 in/yr (<0.01 mm/yr)	<0.0004 in/yr (<0.01 mm/yr)
Tie wire composition	Galvanized, 16 gauge steel	Galvanized, 16 gauge steel	Galvanized, 16 gauge steel



Note: Reinforcing steel should be tested for continuity; that is, assuring that the reinforcements are electrically connected by confirming that the DC resistance is $\leq 1 \Omega$. Connections to test continuity should be made using traditional techniques such as wire ties or welding bonds. Also, pre-wetting of Emaco CP Intact Anodes in clean water prior to encasement is recommended for optimum adhesion of the encasement material.

4. Attaching: Tighten the two pairs of pre-twisted wires by hand around the reinforcing steel in a double wrap pattern to achieve a sound electrical bond (see Photo 1). The pre-twisted wire connectors provide a sound bond, good electrical contact and proper spacing from the reinforcing steel to which the anode is attached. No additional form of attachment or electrical connection is necessary or permitted.

5. Verification: Verify sound electrical connection of the anodes to the reinforcing steel by checking for a DC resistance $\leq 1 \Omega$ (see Photo 2).

6. Encasement Material: Conventional, commercially available encasement material should be used. Corrosion protection is enhanced with low resistance mixes $\leq 20,000 \Omega$ - cm, but mixes should not be selected that exceed 50,000 Ω - cm.

High polymer content and silica fume should not be used. Place encasement materials in accordance with conventional techniques to assure good consolidation.

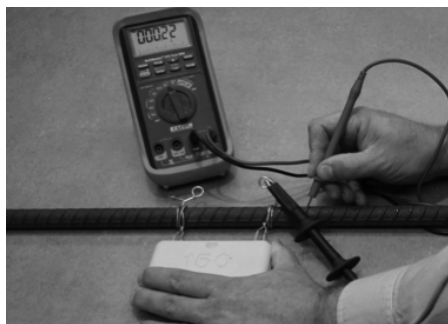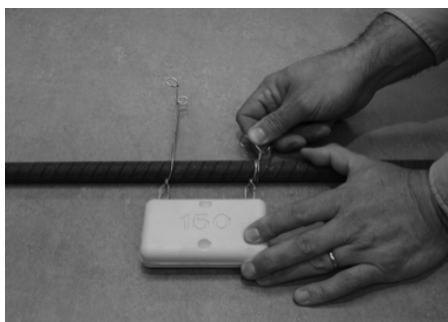

For Best Performance

- When repairing concrete incorporating Emaco CP Intact anodes, make certain to use a compatible repair mortar. Suitable repair products have a resistivity of less than 20,000 Ω -cm. Higher resistivity repair materials can be used. Contact BASF Technical Services for additional information.
- Make certain that the most current versions of the product data sheet and MSDS are being used. Call Customer Service (1-800-433-9517) to verify the most current version.
- Proper application is the responsibility of the user. Field visits by BASF personnel are for the purpose of making technical recommendations only and not for supervising or providing quality control on the jobsite.

BASF Construction Chemicals, LLC – Building Systems

889 Valley Park Drive
Shakopee, MN, 55379

www.BuildingSystems.BASF.com

Customer Service 800-433-9517
Technical Service 800-243-6739



LIMITED WARRANTY NOTICE Every reasonable effort is made to apply BASF exacting standards both in the manufacture of our products and in the information which we issue concerning these products and their use. We warrant our products to be of good quality and will replace or, at our election, refund the purchase price of any products proved defective. Satisfactory results depend not only upon quality products, but also upon many factors beyond our control. Therefore, except for such replacement or refund, BASF MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY, RESPECTING ITS PRODUCTS, and BASF shall have no other liability with respect thereto. Any claim regarding product defect must be received in writing within one (1) year from the date of shipment. No claim will be considered without such written notice or after the specified time interval. User shall determine the suitability of the products for the intended use and assume all risks and liability in connection therewith. Any authorized change in the printed recommendations concerning the use of our products must bear the signature of the BASF Technical Manager.

This information and all further technical advice are based on BASF's present knowledge and experience. However, BASF assumes no liability for providing such information and advice including the extent to which such information and advice may relate to existing third party intellectual property rights, especially patent rights. In particular, BASF disclaims all CONDITIONS AND WARRANTIES, WHETHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY. BASF SHALL NOT BE RESPONSIBLE FOR CONSEQUENTIAL, INDIRECT OR INCIDENTAL DAMAGES (INCLUDING LOSS OF PROFITS) OF ANY KIND. BASF reserves the right to make any changes according to technological progress or further developments. It is the customer's responsibility and obligation to carefully inspect and test any incoming goods. Performance of the product(s) described herein should be verified by testing and carried out only by qualified experts. It is the sole responsibility of the customer to carry out and arrange for any such testing. Reference to trade names used by other companies is neither a recommendation, nor an endorsement of any product and does not imply that similar products could not be used.

For professional use only. Not for sale to or use by the general public.

Form No. 14000080 4/10

Printed on recycled paper including 10% post-consumer fiber.

© 2010 BASF
Printed in U.S.A.